




Perfectly Yours **ChargePack[®] Smart** **ChargePack[®] Smart+**



- Control with Hera Charge Mobil App.
- Extensive Connectivity Options
- OCPP Based Communication
- Dynamic Load Management



- ✓ **Control with Hera Charge Mobil App**
- ✓ **Automatic Pahse Detection**
- ✓ **Compatible with All EVs**
- ✓ **IP54-IP55 & IK10 Protection Class**
- ✓ **Adjustable Maximum Power Output of 7.4kW and 22kW**
- ✓ **Electrical Protection and Safety**
- ✓ **MID Meter and Emergency Button Options**

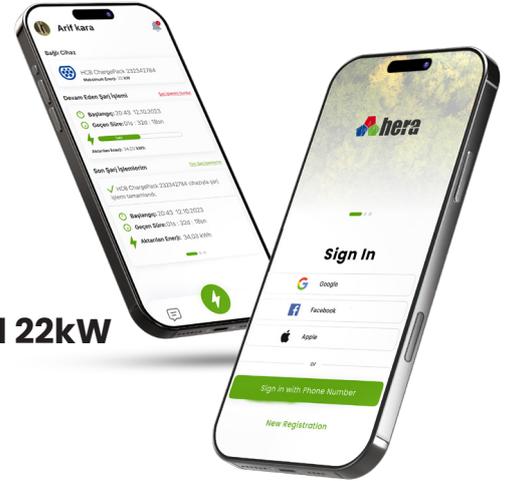

Products	Single phase 7,4 kW	Three phase 22 kW
Product Codes	HC021101222 Smart Cable HC022101222 Smart Socket HC021101322 Smart+ Cable HC022101322 Smart+ Socket	HC021301222 Smart Cable HC022301222 Smart Socket HC021301322 Smart+ Cable HC022301322 Smart+ Socket
Input Values		
Input Power :	7,4 kW / 32 A (max.)	22 kW / 32 A (max.)
Input Voltage:	196 - 264 VAC, 50/60 Hz	340 - 460VAC, 50/60 Hz
Grid Connection:	L, N, PE	L1, L2, L3, N, PE
Charging Output		
Output Power:	7,4 kW / 32 A (max.)	22 kW / 32 A (max.)
Output Voltage:	196 - 264 VAC, 50/60 Hz	340 - 460VAC, 50/60 Hz
Other Features		
Grounding Systems:	TN-S, TN-C, TN-C-S, TT	
Protection:	Over current, Under voltage, Over voltage, Residual current, Short circuit, Over temperature, Ground fault, Integrated surge protection	
Connection:	Terminal block	
Standby Power:	<5W	
Connector Type:	Type2 Cable, Type2 Socket	
Cable Length:	5 meter@Cable	
Internal RCD: (Leakage Current):	AC 30mA + DC 6mA	
Energy metering:	MID meter (optional)	
Weight:	6.1 kg (cable) / 4,4 kg (socket)	7.4 kg (cable) / 4,8 kg (socket)

